


FULL SPLIT FACE

ARCHITECTURAL MASONRY UNITS




FULL SPLIT FACE

ARCHITECTURAL MASONRY


Full Split Face provides a solid base for creative expression. Layers, colour changes or added accents shine when combined with Full Split Face.

Top View

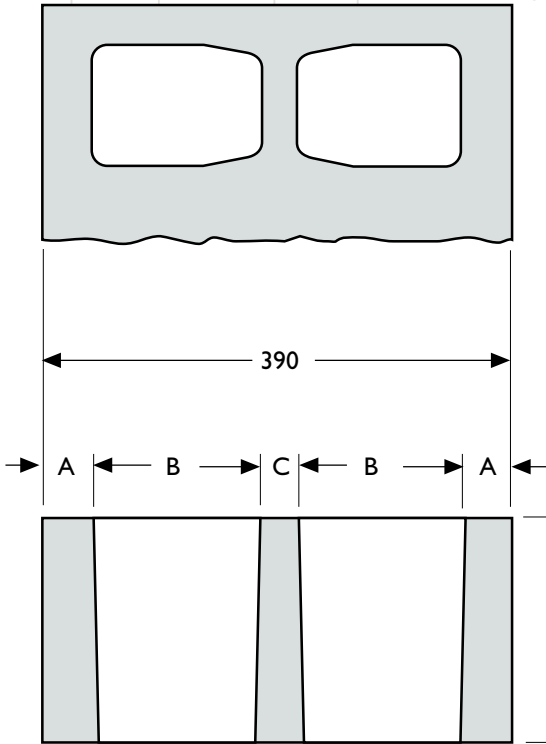


NOMINAL WIDTH (cm)	10	20	25
A	S	46	48
B	O	135	131
C	L	26	29
D	I	64	67
E	D	96	140
F		35	35
G	95	195	245

All dimensions in millimeters. Dimensions may vary slightly, please check with your Expocrete Key Account Manager.

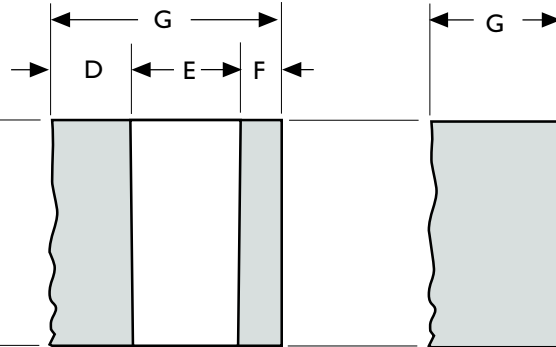

Side View

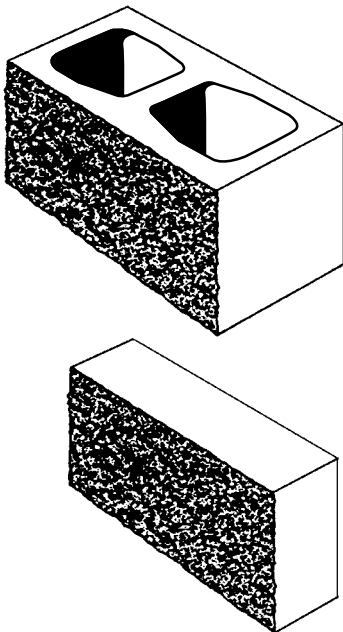

End View

90


NOMINAL WIDTH (cm)	10	20	25
Mass (KG) Normal Weight	15	21	27.5
Mass (KG) Light Weight	11.7	16.3	21
Hollow		•	•
Solid	•		

MANUFACTURED AS			
Stretcher	•	•	•
Half High	•	•	
Half	•	•	
L Corner	•		
Split Ledge	•		
Split Ledge Corner	•		



SPLIT LEDGE

ARCHITECTURAL MASONRY UNITS

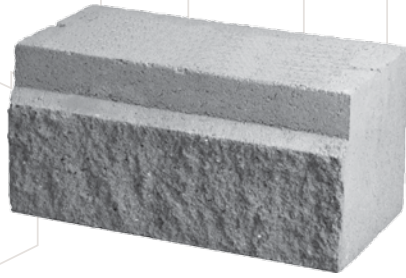


SPLIT LEDGE

ARCHITECTURAL MASONRY

With it's chiselled good looks - Split Face Ledge makes a firm foundation for any block face. Or let it stand on it's own for a layered look.


Top View

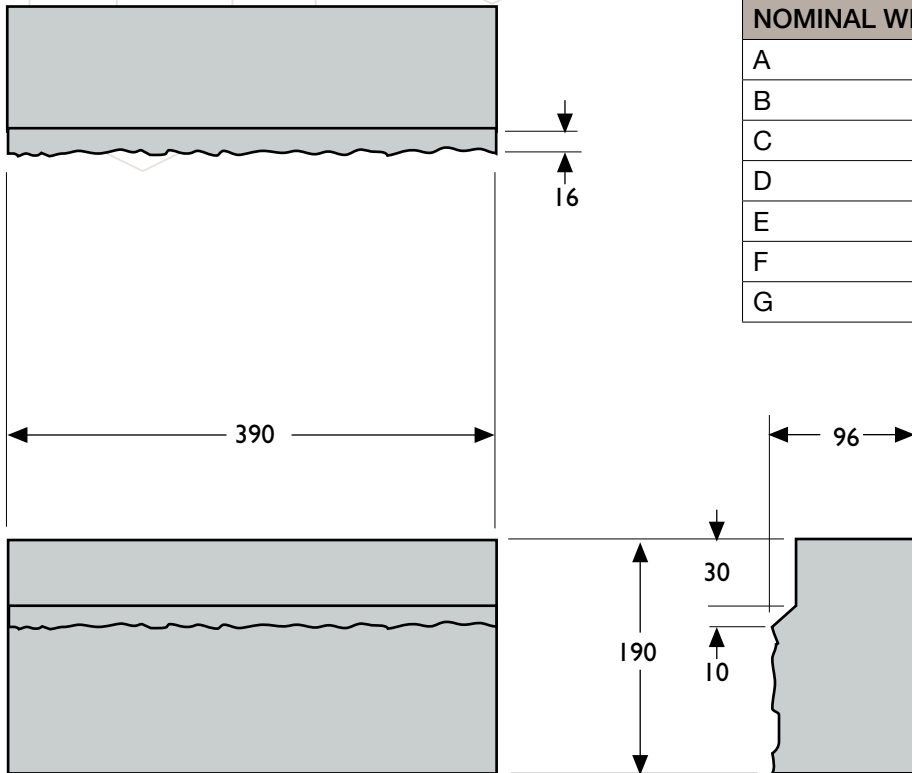

NOMINAL WIDTH	
A	S
B	O
C	L
D	I
E	D
F	
G	95

Side View

End View




NOMINAL WIDTH (cm)	10
Mass (KG) Normal Weight	14.7
Mass (KG) Light Weight	11.72
Hollow	
Solid	•

MANUFACTURED AS	
Stretcher (Plain End)	•
Return Corner	•



HALF HIGH SPLIT FACE

ARCHITECTURAL MASONRY UNITS

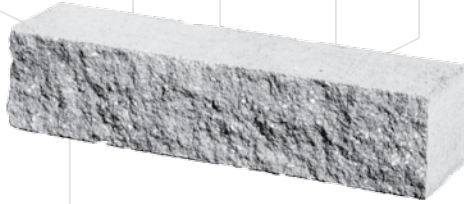


HALF HIGH SPLIT FACE

ARCHITECTURAL MASONRY


Use Half High to create scale and rhythm or combine it with Full Split to achieve a pattern or a multi layered look by adding a functional and aesthetic banding.

Top View

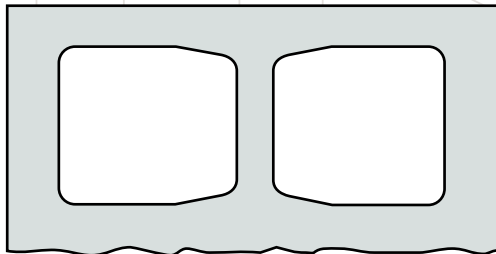

390


A ← B → C ← B → A ←



90

Side View

End View

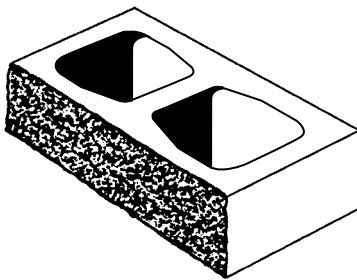

NOMINAL WIDTH (cm)	10	20
Mass (KG) Normal Weight	7.4	7.7
Mass (KG) Light Weight	5.9	6.73
Hollow		
Solid	•	•

MANUFACTURED AS	10	20
Stretcher (Plain End)		
Half		
Half High	•	•
L Corner		
K.O. Bond Beam		
Corner Split ISIE		
O Block		



FOUR RIB SPLIT FACE


ARCHITECTURAL MASONRY UNITS



FOUR RIB SPLIT FACE

ARCHITECTURAL MASONRY


Change the ordinary into extraordinary with the rugged relief of this split face ribbed block - accentuate the texture by combining it with a smooth faced block.

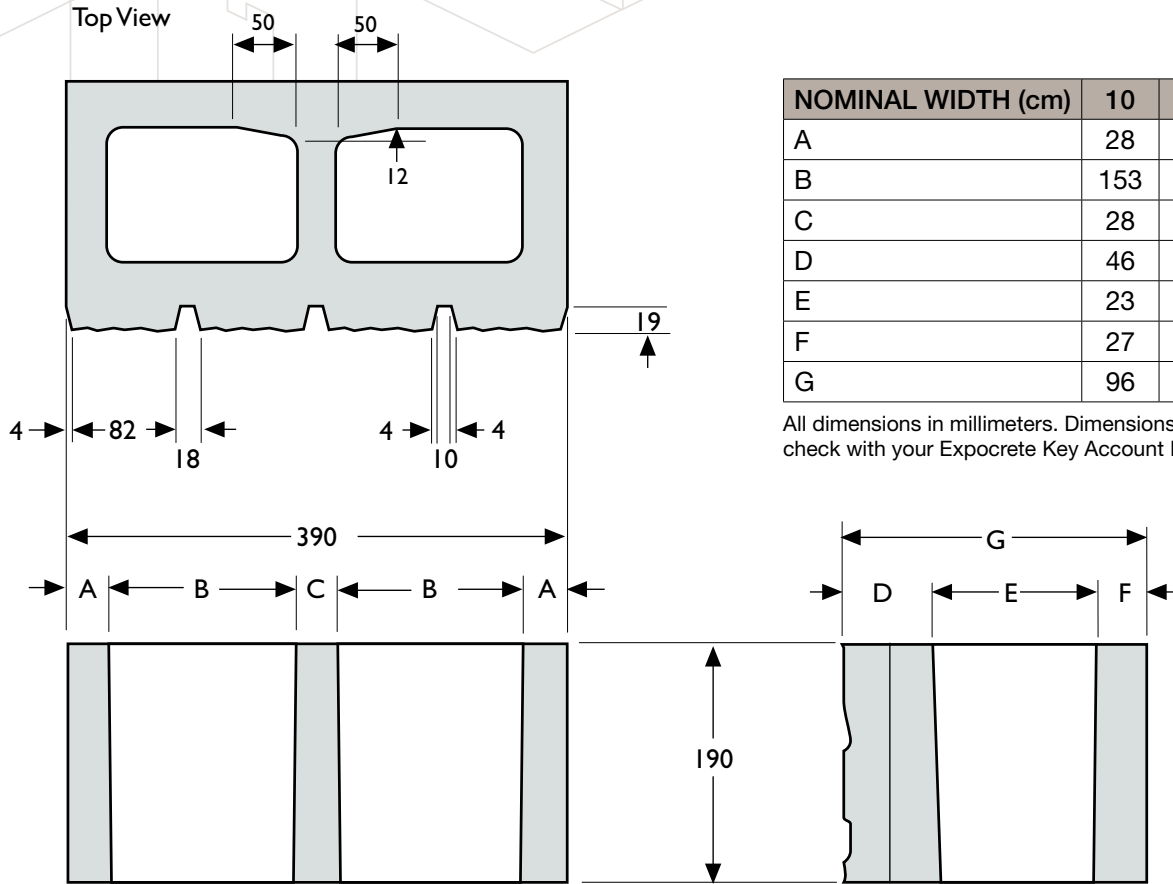

NOMINAL WIDTH (cm)	10	20	25
A	28	37	50
B	153	144	127
C	28	28	36
D	46	47	51
E	23	117	160
F	27	32	35
G	96	196	246

All dimensions in millimeters. Dimensions may vary slightly, please check with your Expocrete Key Account Manager.

Side View

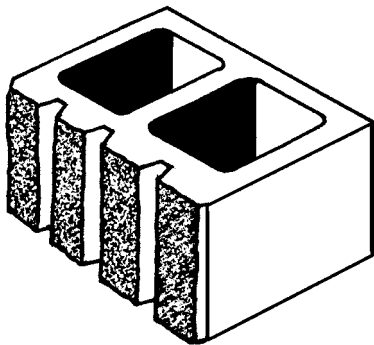

End View

NOMINAL WIDTH (cm)	10	20	25
Mass (KG) Normal Weight	15.9	20.1	24.9
Mass (KG) Light Weight	10.4	18.3	21
Hollow		•	•
Solid	•		

MANUFACTURED AS			
D.E. Stretcher	•	•	•
Half			
K.O. Bond Beam			
Return	•	•	



SINGLE SCORE

ARCHITECTURAL MASONRY UNITS




SINGLE SCORE

ARCHITECTURAL MASONRY

This simple bold style can be the keystone to set your creativity free. Combine colours and other textures to capture the essence of Single Score.



Top View

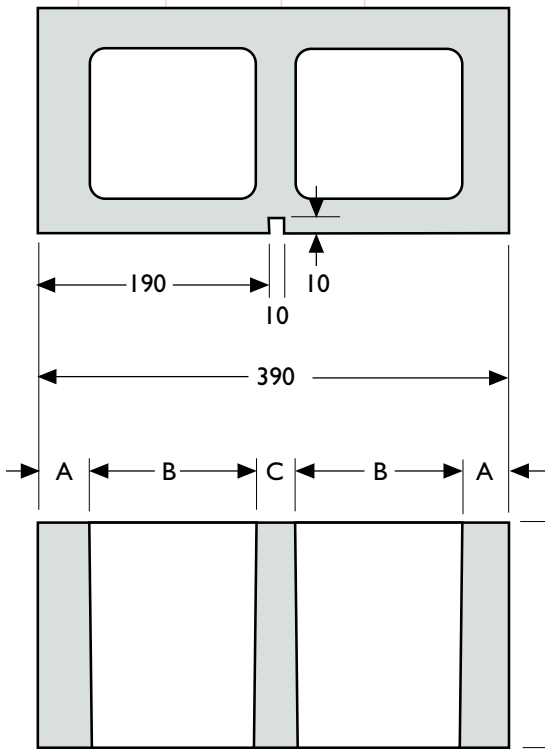

NOMINAL WIDTH	10	20	25
A	26	48	48
B	156	134	132
C	26	26	30
D	26	32	35
E	38	126	170
F	26	32	35
G	90	190	240

Side View

End View

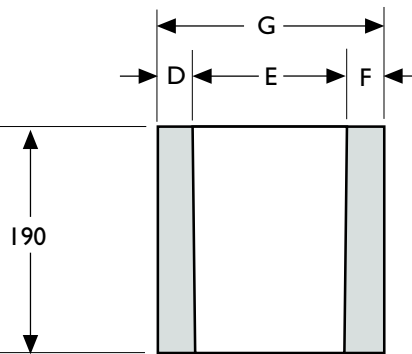

UNIT DATA	10	20	25
Nominal Width (MM)	10	20	25
Mass (KG) Normal Weight	11.9	17.3	21.6
Mass (KG) Light Weight	8.6	13.6	16.1
Hollow	•	•	•
75% Solid		•	•
Solid	•	•	

MANUFACTURED AS	100	200	250
Stretcher	•	•	•

Note: 200 mm & 250 mm Single Score is available only in natural grey colour.



ARCHITECTURAL
MASONRY UNITS

TERRAZZO BLOCK

BURNISHED ARCHITECTURAL MASONRY UNIT



TERRAZZO BLOCK

BURNISHED MASONRY UNIT

Use Terrazzo to add polish and sparkle to both interior spaces and exterior faces. It's burnished finish not only provides a durable barrier to moisture, but also a beautiful unique finish.



Grigio Naturale



Granito




Pietra Antica




Lucidare

TERRAZZO BLOCK

BURNISHED MASONRY UNIT

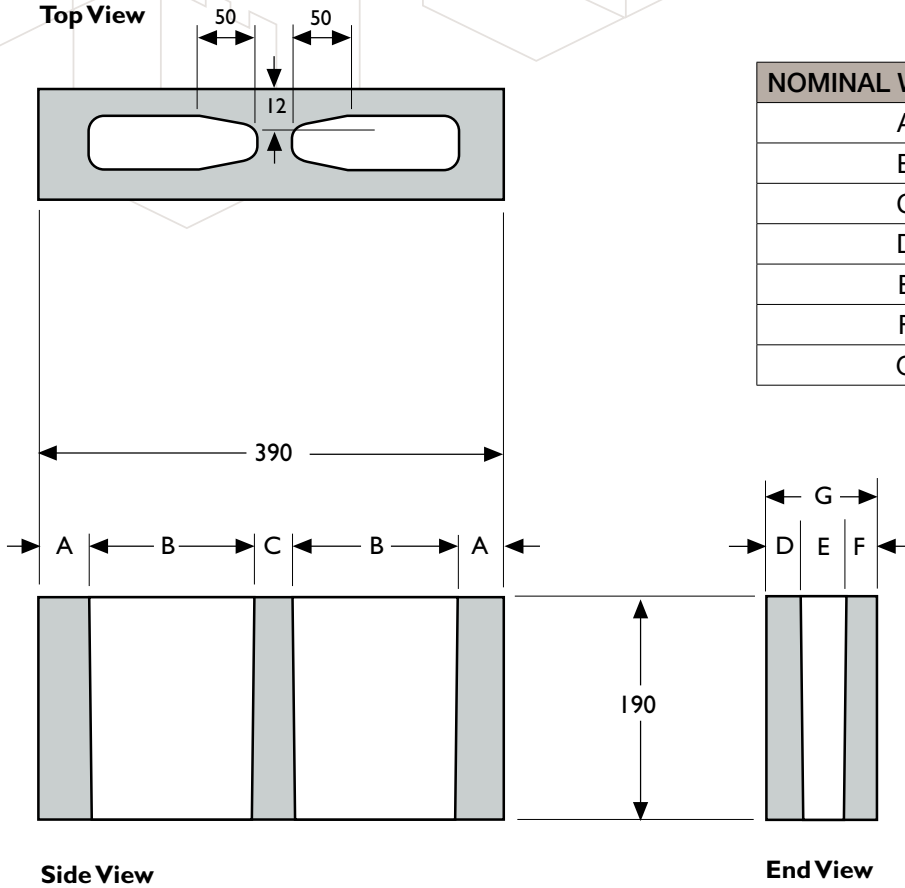

NOMINAL WIDTH (cm)	10	15	20
A	35	35	35
B	147	147	147
C	26	26	26
D	24	27	30
E	38	82	126
F	26	29	32
G	88	138	188



UNIT DATA			
NOMINAL WIDTH (cm)	10	15	20
Mass (KG) Heavy Weight	13.1	15.7	16.2
Hollow	•	•	•

MANUFACTURED AS	10	15	20
Standard	•	•	•
Half High	•		
Half	•	•	•
Return Corner		•	•
Half Return Corner	•	•	•
L-Corner	•		
L-Corner Half High	•		




TERRAZZO BLOCK AVAILABILITY

Available in metric sizes only.
Width of units may vary by +/- 2.0mm.

Standard (One face only):


10 cm

88 W
190 H
390 L




**10 cm
Half High**

88 W
90 H
390 L




15 cm

138 W
190 H
390 L



20 cm


188 W
190 H
390 L



Half (One face only):


10 cm

88 W
190 H
190 L




15 cm

138 W
190 H
190 L



20 cm


188 W
190 H
190 L



Return Corner (One face and one end only):


15 cm

138 W
190 H
390 L



20 cm


188 W
190 H
390 L



Half Return Corner (One face and one end only):


10 cm

88 W
190 H
190 L




15 cm

138 W
190 H
190 L



20 cm


188 W
190 H
190 L



L-Corner (One face and L-Corner end only):


10 cm

88 W
190 H
390 L



**10 cm
Half High**

88 W
90 H
390 L



TERRAZZO BLOCK TECHNICAL DATA

MANUFACTURE

Terrazzo Block by Expocrete, with its burnished face meets or exceeds the current CSA A165.1-04M Standard for Concrete Masonry Units and does not contain visible coal or ironstone particles. Terrazzo Block is manufactured with an approved integral water repellent admixture used in accordance with the manufacturer's specifications. The ground faces of the masonry units are sound and free of cracks or other defects that would impair the strength or permanence of the construction or interfere with the placing of the unit, in accordance with the CSA A371 Standard.

SAMPLE PANELS

Pre-construction jobsite panels, a minimum size of 1200mm x 1200mm or 4' x 4', should be constructed to establish specified product, mortar colour and installation acceptance.

HANDLING and CHIPPAGE

While burnished faced units are to be handled with extreme care at all times it should be recognized that minor chipping, of not more than 3 mm in size, can be incidental to the usual methods of manufacturing, delivery and handling and shall not be considered defects. In addition, when viewed under diffused lighting from a distance of 6.0 metres, not more than 5% of a shipment has small chips larger than 3 millimetres in size.

CONSTRUCTION

Cavity wall construction is recommended for exterior above grade walls, with proper flashing, venting and weep holes. The exterior mortar mix should contain an approved water repellent additive, following the manufacturer's instructions, and be tucked and tooled in a concave shape. When sawing block, it is recommended to use a dry cut diamond blade. Do not use wet saw cuts.

CLEANING

Cleaning during construction of the walls requires the use of clean medium hard bristle brushes, cotton rags or burlap squares to remove the green mortar residue. Do not use abrasives or acids. For a final cleaning use a detergent masonry cleaner strictly following the manufacturer's instructions, including a thorough rinsing.

GLOSS COATINGS

To accent and protect the natural beauty of the burnished face exposed aggregate, a jobsite applied acrylic semi-gloss or gloss coating is recommended after the final wall cleaning has been approved. The coating is specified in Section 09900 and is supplied and applied by painters.

JOBSITE PROTECTION

Finished walls should be protected from construction stains and trade damage by the use of plastic covering and where exterior corners are exposed plywood covering should be used.

LOCAL TECHNICAL ASSISTANCE

For additional assistance please contact your local Expocrete Key Account manager or visit www.expocrete.com

